

Architectural Specifications

SPECIFICATIONS – BIRD SPIKE 2001

PART 1 – GENERAL

1.1 SUMMARY

- A. Design Requirements: Select appropriate size and system as determined by site conditions to prevent birds from landing and roosting on specified surfaces.

1.2 QUALITY ASSURANCE

- A. Single Source Responsibility: Furnish products from one manufacturer for entire project.
 B. Obtain all technical information from the manufacturer.
 C. Utilize labor or Bird-B-Gone Authorized installers who are knowledgeable in Bird-B-Gone, Inc. product installations.
 D. Installer shall visit the site to gather all information on existing site conditions.

1.3 SUBMITTALS

- A. Product Data: Submit manufacturer's descriptive literature and product specifications for each product including catalogs, installation instructions other descriptive material.
 B. Provide Warranty on Material and Installation.
 C. Provide samples of each type of spike excluding proposed fastening methods.
 D. Provide statement by official indicating that they are a certified installation company.

1.4 PRODUCT HANDLING

- A. Protect Bird-B-Gone, Inc. products from damage before during and after the installation.

1.5 PROJECT CONDITIONS

- A. Coordination: Furnish samples of system(s) so installation can be coordinated with existing conditions and within on-site conditions.
 B. Visit site and field measure prior to fabrication and delivery of materials.

1.6 WARRANTY

- A. Product shall carry a minimum 10-year guarantee against U.V. breakdown – stainless Steel Degradation.
 B. Installation shall be guaranteed for 2 years.

PART 2 – PRODUCTS

2.1 ACCEPTABLE MANUFACTURER

Manufacturer:
Bird-B-Gone, Inc.
 Bird Spike 2001 Stainless Steel
 23918 Skyline
 Mission Viejo, CA 92692
 Tel: 800-392-6915 or 949-472-3122
 Fax: 949-472-3116
 P.O.C.: Bruce Donoho
 Email: nobirds@birdbgone.com

2.2 PRODUCT DESCRIPTION

- A. Model Designation:
 1. SPIKE 2001 - 1", 3", 5" or 8"
 a. Width of Coverage:
 i. Spike 2001-1" - 1" - 2" widths
 ii. Spike 2001-3" - 2" - 4" widths
 iii. Spike 2001-5" - 5" - 7" widths
 iv. Spike 2001-8" - 8" - 10" widths
 b. Minimum 40 Spikes per Foot in Linear Array / **No Gap Non-Staggered Design**
 c. Height: 4-1/2"
 d. Base Strip: Flexible
 e. Length: 2 ft. sections
 f. **Bend & Crush Anchoring of Steel Spike into Base Unit.**
 g. Packaging: 50ft./Box...25-2ft. sections/ box.
 h. Number of Rows: As determined by the manufacturer and based on project conditions.
 i. Mounting System: As determined by the manufacturer and based on project conditions.

2.3 MATERIALS

- A. Material: U.V. Stabilized Polycarbonate. Heat and weather resistant (+310 Deg. F. to -200 Deg. F.) **Premium High-Grade Stainless Steel Rods.**
 B. Construction: Rigid One-Piece construction.
 C. Adaptation: Tin snips, hacksaw, etc. can be used to cut/adapt the product to desired length.

2.4 MOUNTING SYSTEMS

- A. Wood: Use #8 Wood Screws. For every 2 ft. Section of Bird Spike 2001, ten (10) #8 wood screws are required.

- B. Steel, Brick, Stone or Concrete: Use an outdoor construction adhesive that is not silicone based. Purchase from the manufacturer or call for recommended adhesives. If mounting surface warrants, screw or bolt down Bird Spike 2001• in conjunction with using the adhesive.
 C. Pipes or Poles: Tie-Wraps can be used alone or in conjunction with an outdoor construction adhesive. For U.V. protected tie-wraps, purchase directly from the manufacturer or call for recommended products.

PART 3 – EXECUTION

3.1 EXAMINATION

- A. Examine the installation area and note any detrimental or hazardous work conditions. Notify contracting officer or inspector of the detrimental work conditions.
 B. Do not proceed with installation until conditions are correct.

3.2 SURFACE PREPARATION

- A. Surface should be thoroughly cleaned and free of bird droppings, nesting materials, rust, peeling paint or other debris.
 B. Remove or repair articles that may damage Bird Spike 2001• after installation, including overhanging foliage, brush and loose parts on the structure.


3.3 INSTALLATION

- A. Install Bird Spike 2001 as recommended by the manufacturer.
 B. Bird Spike 2001 should be installed correctly, covering the entire depth of the surface, not just the perimeter.
 1. Follow the contours and angles closely: cut or break away to fit properly.
 2. Space materials in accordance with manufacturer's recommendations.


3.4 INSPECTION

- A. Visually inspect Bird Spike 2001 for any signs of poor installation, including loose screws, fasteners and un-removed debris.
 B. Immediately correct and repair as necessary.

END OF SPECIFICATIONS

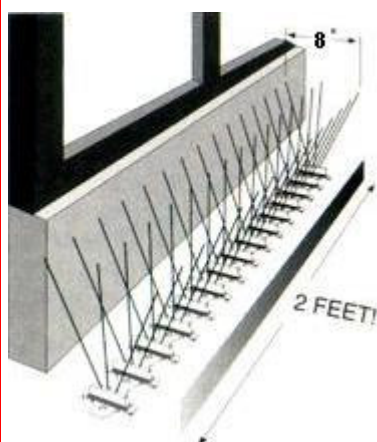


Patented Bend & Crush Anchoring System!

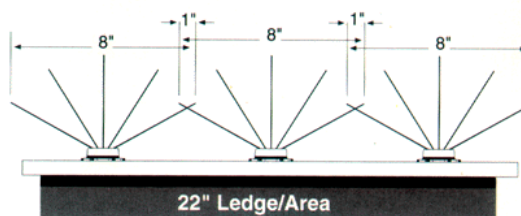

For Wide Areas and Heavy Infestations:
 Intertwine Spike with 1" overlap on both Vertical and Horizontal Surfaces.

Underside View

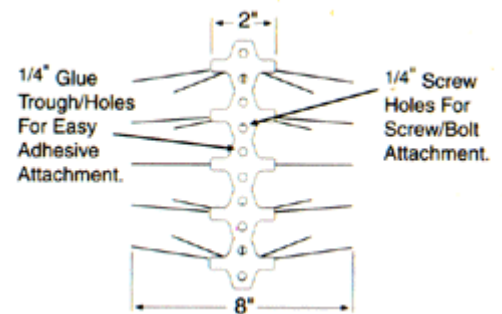

Patented Bend & Crush Process
 Pins are Permanently Anchored in the Base of the Spike